



BAS SECTOR COLLETS

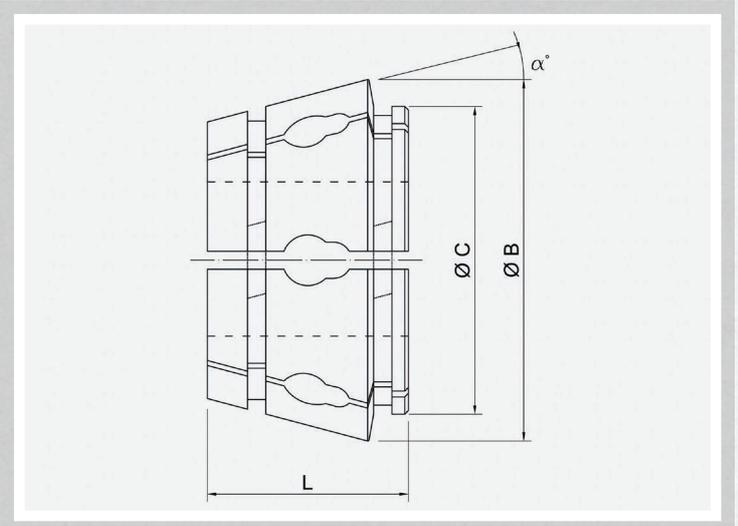

Type of impulse collet in galvanized steel, tempered and adjusted with a closing range of 2mm.

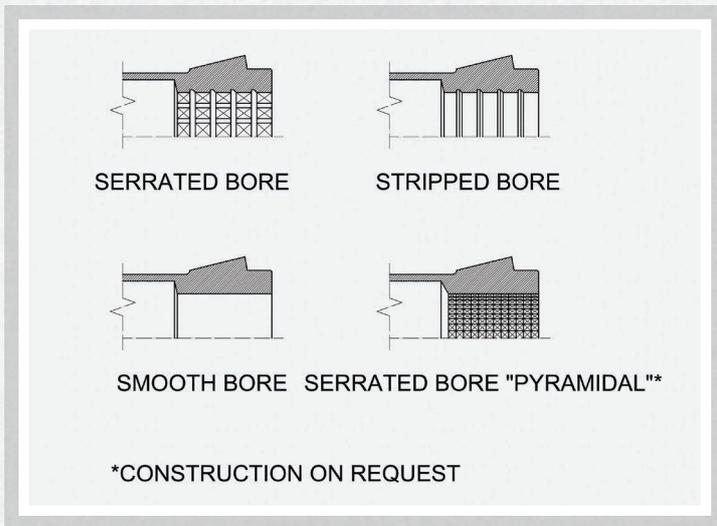

Product Details

COLLET ARTICLE	DESCRIPTION	DIMENSIONS					BORE MAX			CAPACITY 'TIGHTENING	UNITS IN STOCK
		A	B	C	L	α	ROUND	HEXAG.	SQUARE		
10 042 00	BAS 42		62	50	43	15°	6~37	31	25	2+/-0,2	
10 052 00	BAS 52		72	60	43	15°	6~47	40	32	2+/-0,2	
10 060 00	BAS 60		86	73	45	15°	6~60	50	45	2+/-0,2	
10 070 00	BAS 70		100	85	55	15°	8~70	60	50	2+/-0,2	•
10 080 00	BAS 80		119	100	60	15°	15~80	70	56	2+/-0,2	•
10 100 00	BAS 100		136,5	120	65	15°	30~100	86	70	2+/-0,2	
10 120 00	BAS 120		167	145	80	15°	40~120	103	85	2+/-0,2	
10 150 00	BAS 150		207	182	90	15°	60~150	130	106	2+/-0,2	